


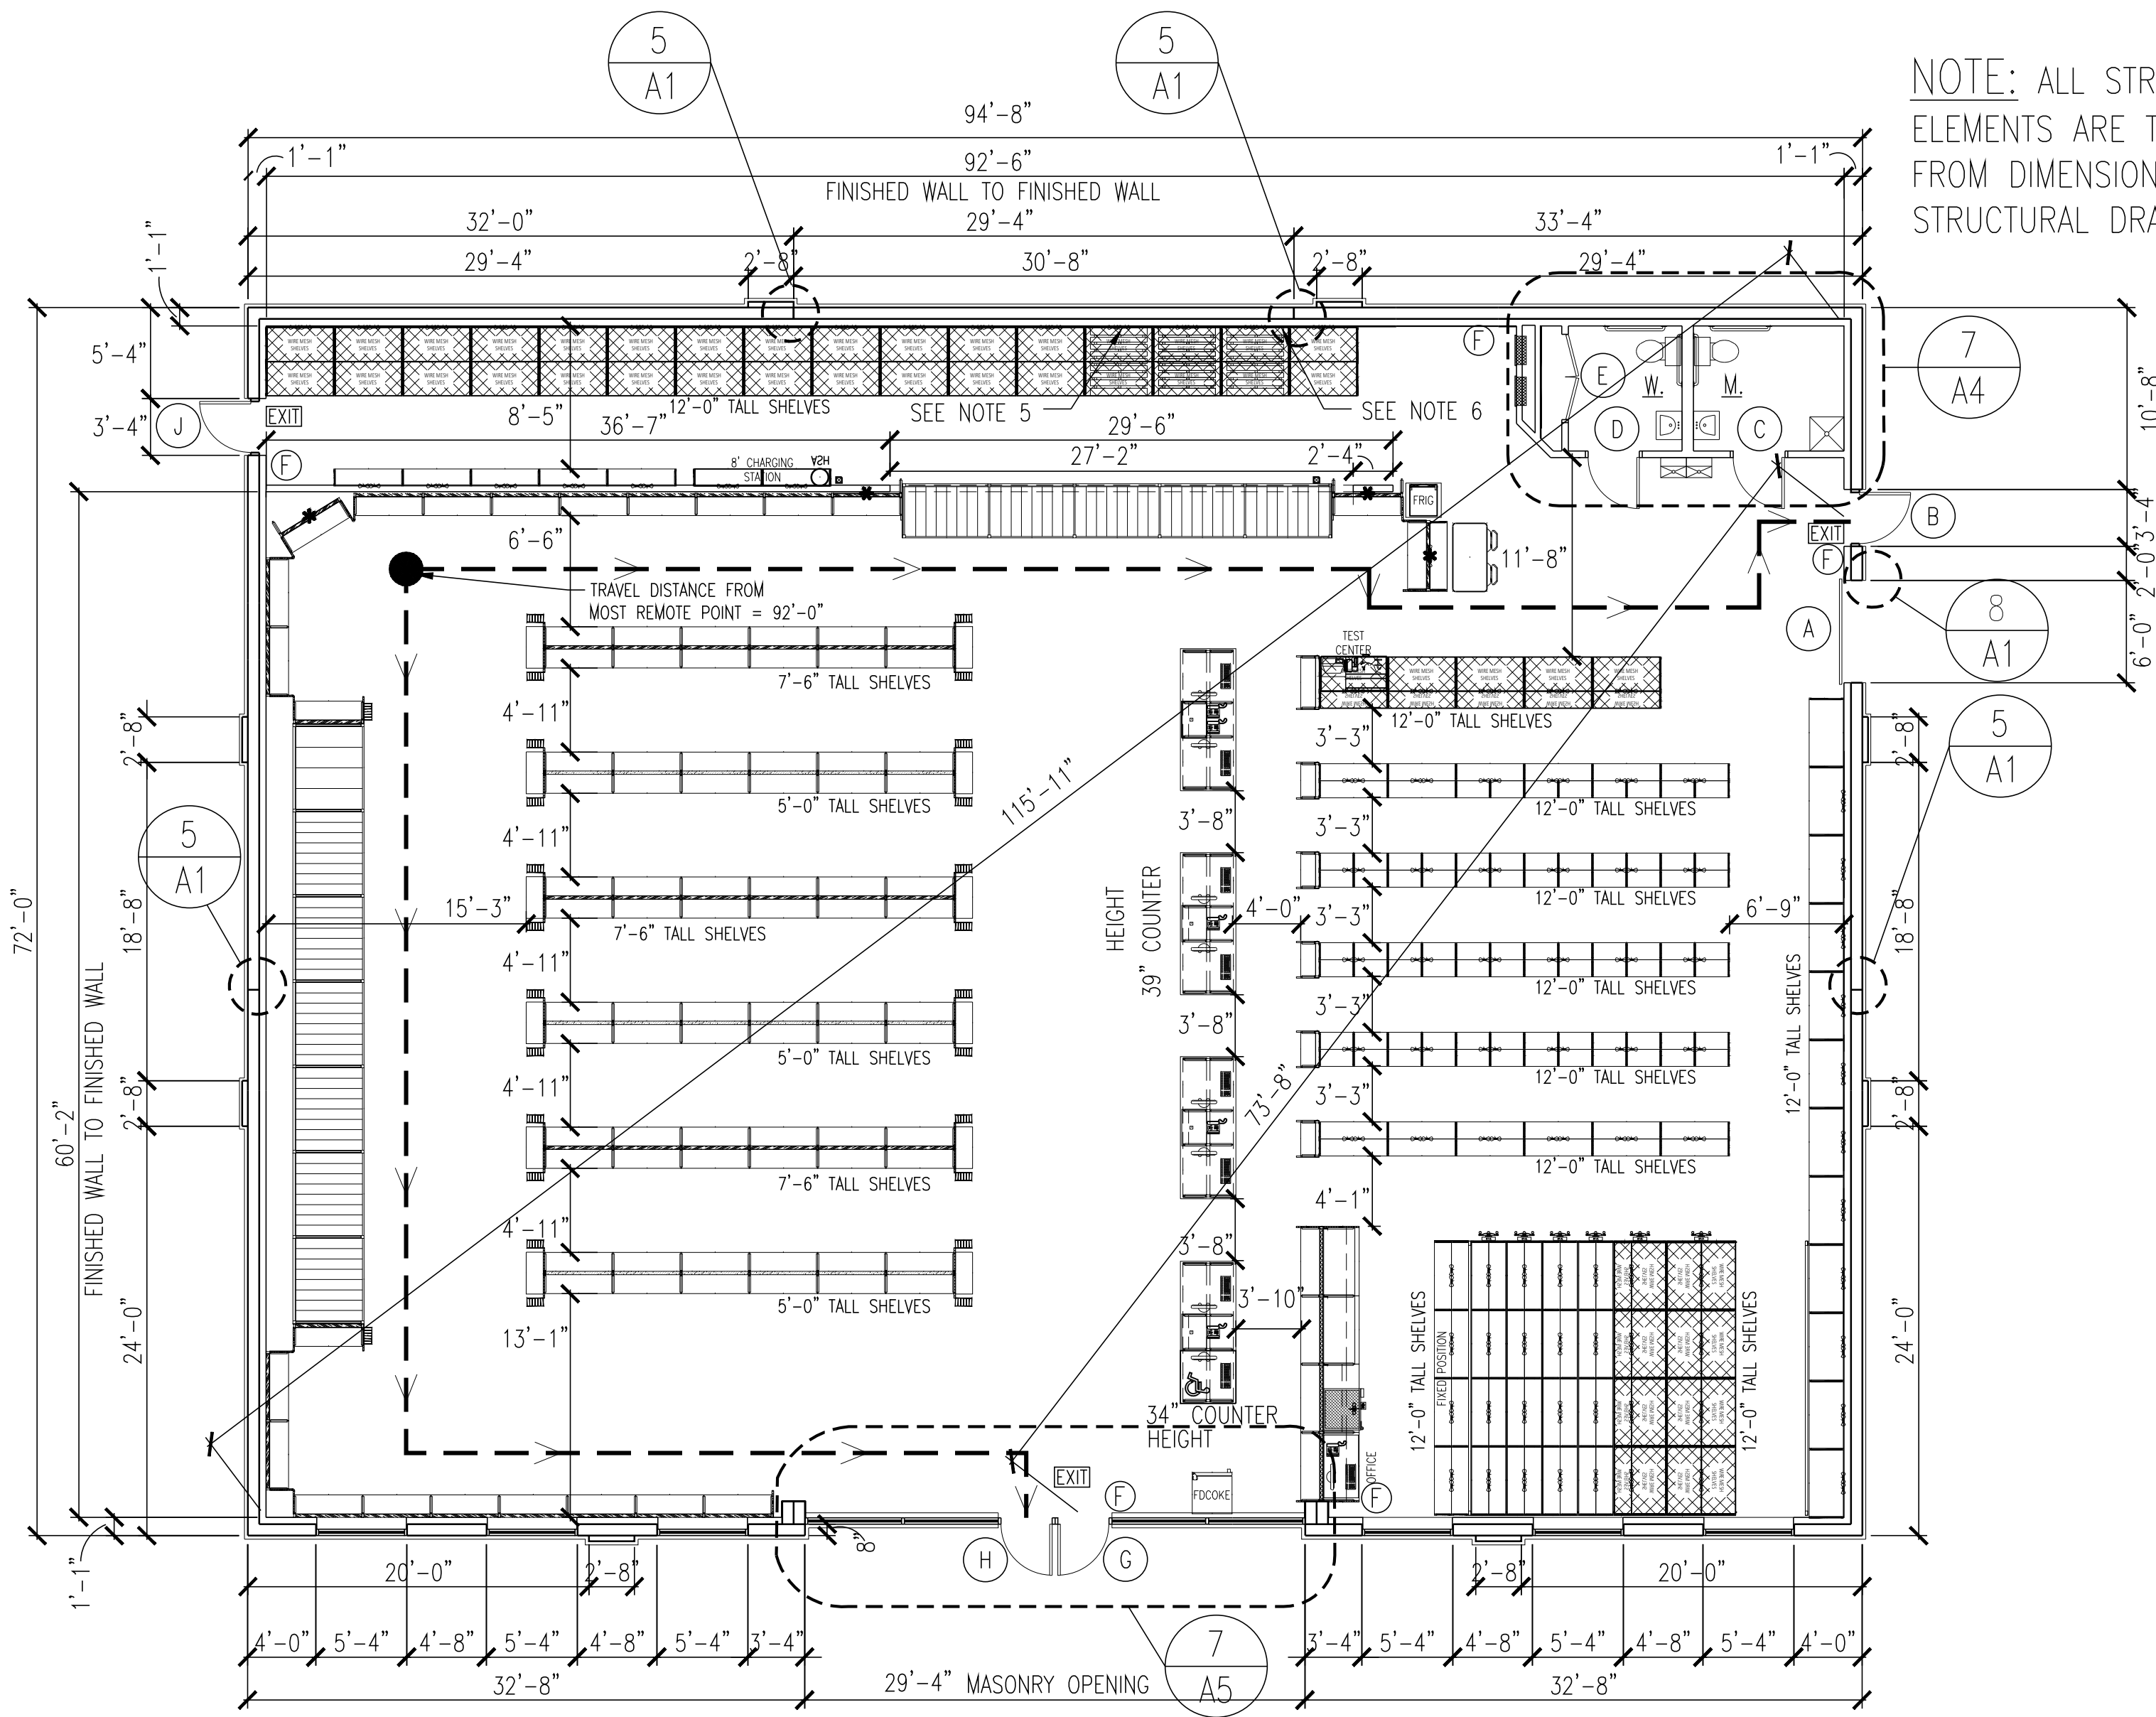

NOTE:Ⓔ = NEW DRY CHEMICAL FIRE EXTINGUISHER. GENERAL CONTRACTOR TO INSTALL ONE KIDDE 10 lb #46620420 AT BATTERY CHARGING AND KIDDE 5 lb #FC-340M-VB AT ALL OTHER LOCATIONS. INSTALL EITHER ON WALL SURFACE, FIXTURE UPRIGHT OR ALUMINUM MULLION. MOUNTING HEIGHT = 3'-6" ABOVE FINISHED FLOOR TO TOP OF EXTINGUISHER.

1/8" = 1'-0"

1 FLOOR PLAN

1. REFER TO STRUCTURAL DRAWINGS FOR ALL DETAILS AND REQUIREMENTS REGARDING FOUNDATIONS, WALL REINFORCING, BOND BEAMS, LINTELS, AND ROOF FRAMING.
2. REFER TO CIVIL DRAWINGS FOR LOCATIONS AND DETAILS OF SIDEWALKS, PIPE GUARDS, ETC., AS WELL AS FINISH FLOOR ELEVATION AND EXTERIOR FINISHED GRADES AROUND THE BUILDING.
3. INSTALL 6" WIDE, 20 GAUGE GALVANIZED SHEET METAL STRIP BETWEEN THE BACK OF THE GYPSUM BOARD AND THE FACE OF THE METAL STUD AROUND THE ENTIRE PERIMETER OF THE BUILDING, AS WELL AS BOTH SIDES OF THE CURTAIN WALL. TOP OF STRIP TO BE 93" ABOVE FINISHED FLOOR. REFER TO SHEET A-4 FOR DETAILS OF CURTAIN WALL.
4. SEE SHEET P-1 FOR LOCATION OF NON FREEZE YARD HYDRANT AND INSTALLATION REQUIREMENTS.
5. INSTALL 1/2" X 4'-0" X 8'-0" AC PLYWOOD HORIZONTALLY WITH THE LONG EDGE ON THE FLOOR AND THE END JOINT CENTERING ON A STUD. APPLY PLYWOOD TO THE METAL STUDS WITH SCREWS TO FACILITATE FUTURE REPLACEMENT. PROVIDE "J" MOLD WHERE PLYWOOD AND GYPSUM BOARD MEET. SEE INTERIOR ELEVATIONS SEE 3/A4 DETAIL.
6. INSTALL TWO 4' x 8' SHEETS OF BLACK FRP VERTICALLY BEHIND BATTERY RACK. SEE SECTION 09986 OF THE SPECIFICATIONS AND INTERIOR ELEVATIONS ON SHEET A-4.
7. SEE SPECIFICATIONS FOR INFORMATION ON ITEMS NOT COMPLETELY DELINEATED ON THE DRAWINGS.

AFN01

1/8" = 1'-0"

2 FLOOR PLAN NOTES

LOCATION	FLOOR		BASE		WALLS		CLG.	REM.
	SEALED CONCRETE	VINYL TILE	VINYL	QUARRY TILE	GYPSUM BOARD	FIBER REINFORCED PANELS	METAL DECK	GYPSUM BOARD
SALES AREA		●	●		●		●	
REST ROOMS	●		●			●		●

3/16" = 1'-0"


3 ROOM FINISH SCHEDULE

AFCC01 3/32" = 1'-0"


4 DOOR SCHEDULE -- HOLLOW METAL DOORS & FRAMES

MK	SIZE	TYPE	FRAME	JAMB DETAIL	HEAD DETAIL	ADA / EXIT HARDWARE
A	6'-0" x 8'-0"	STEEL OVERHEAD ROLL-UP	STEEL ANGLE	6;7&8/A1	6&7/A1	
B	3'-0" x 7'-0" x 1-3/4"	HOLLOW METAL	HOLLOW METAL	8/A1	8/A1	PUSH BAR EXIT DEVICE WILL HAVE AN INTEGRAL SOUNDER
C	3'-0" x 6'-8" x 1-3/4"	SOLID CORE WOOD UNDERCUT DOOR 1"	HOLLOW METAL	8/A1	8/A1	LEVER HANDLE PRIVACY SETS
D	3'-0" x 6'-8" x 1-3/4"	SOLID CORE WOOD UNDERCUT DOOR 1"	HOLLOW METAL	8/A1	8/A1	LEVER HANDLE PRIVACY SETS
E	2'-6" x 6'-8" x 1-3/4"	SOLID CORE WOOD PAIR REQUIRED	HOLLOW METAL	8/A1	8/A1	UNDERCUT DOOR 1" (PAIR REQUIRED)
G	3'-0" x 7'-0" x 1-3/4"	GLASS & ALUMINUM SEE SHEET A-5	ALUMINUM	SEE MANUFACTURER'S SHOP DRAWINGS		3 POINT LOCKSET
H	3'-0" x 7'-0" x 1-3/4"	GLASS & ALUMINUM SEE SHEET A-5	ALUMINUM	SEE MANUFACTURER'S SHOP DRAWINGS		3 POINT LOCKSET
J	3'-0" x 7'-0" x 1-3/4"	HOLLOW METAL	HOLLOW METAL	8/A1	8/A1	PUSH BAR EXIT DEVICE


SEE SECTION 08700 OF THE SPECIFICATIONS

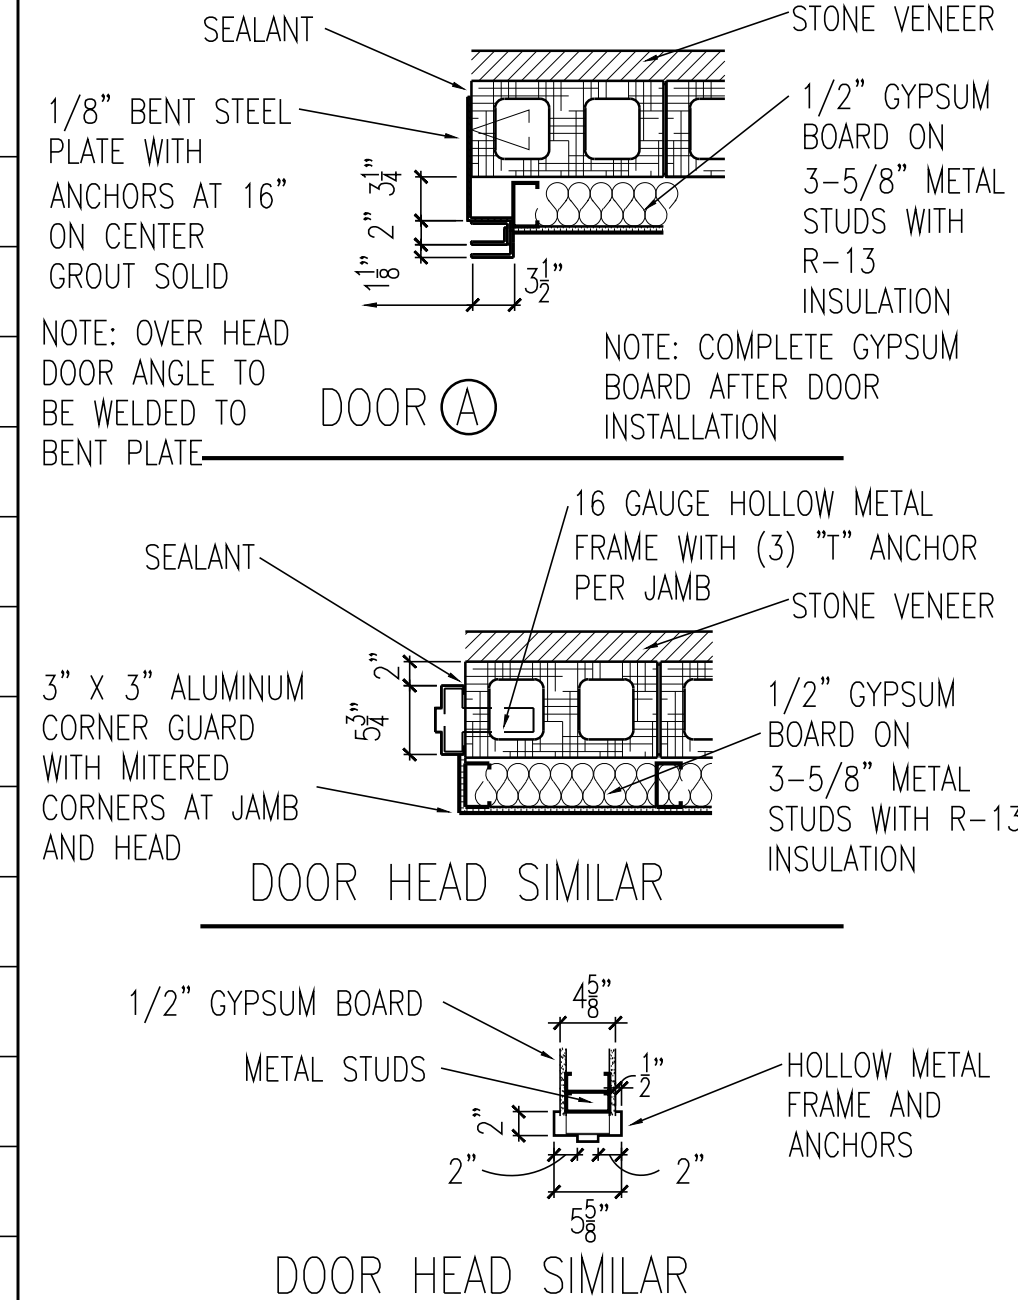


9 JAMB DETAILS

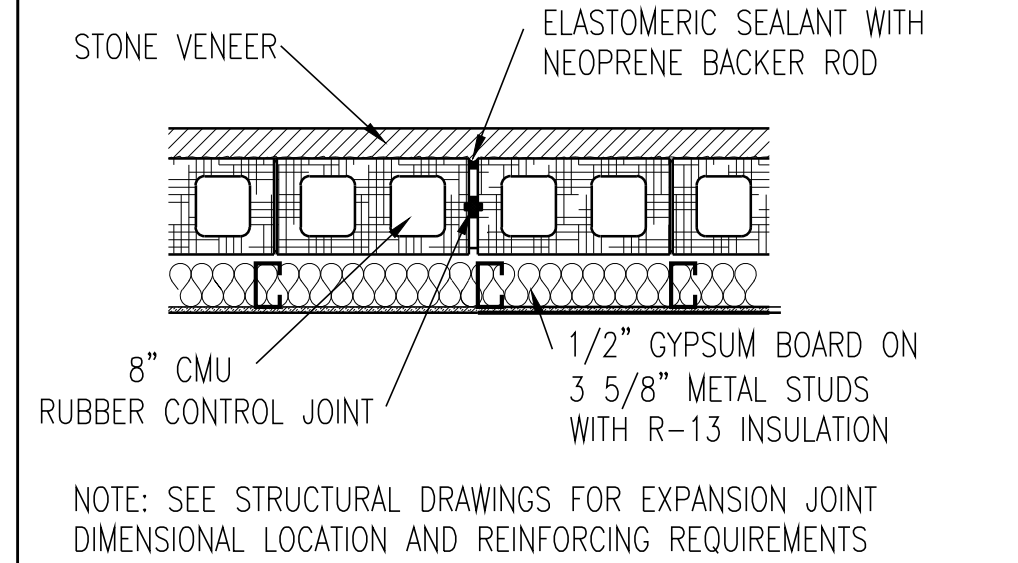


5 EXPANSION JOINT DETAIL

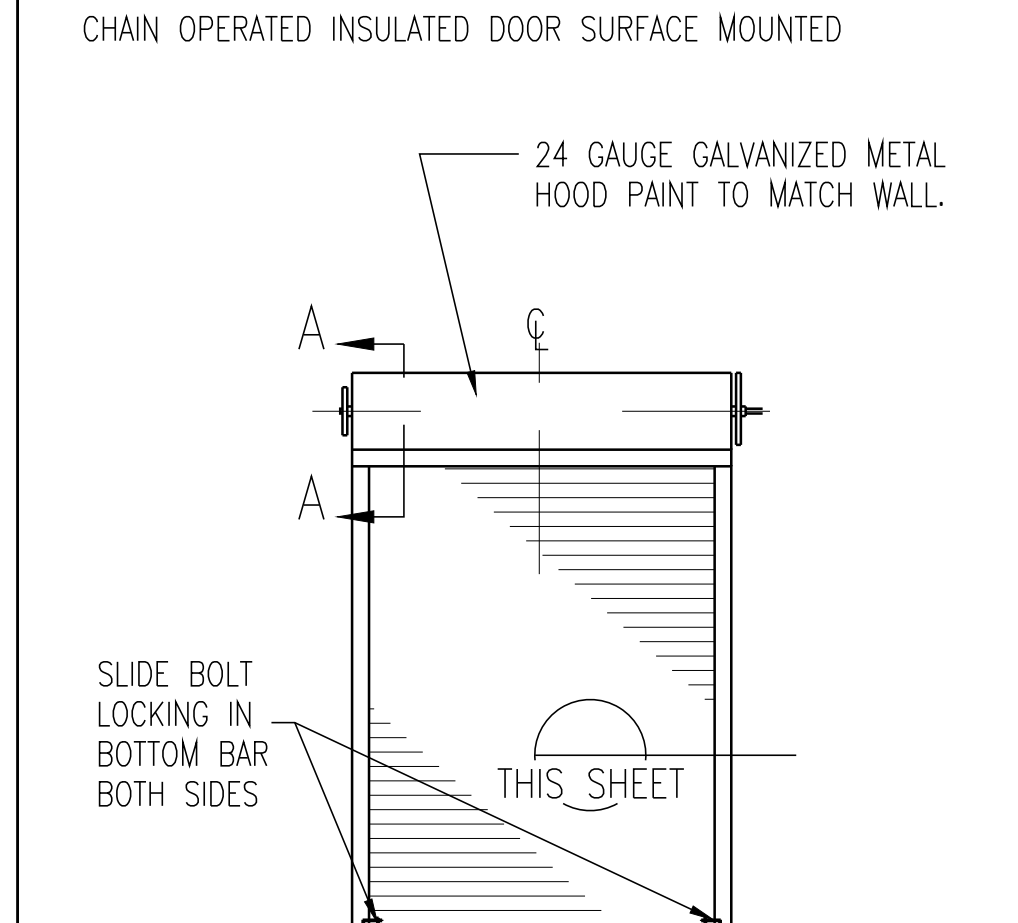

7 OVERHEAD DOOR ELEVATION

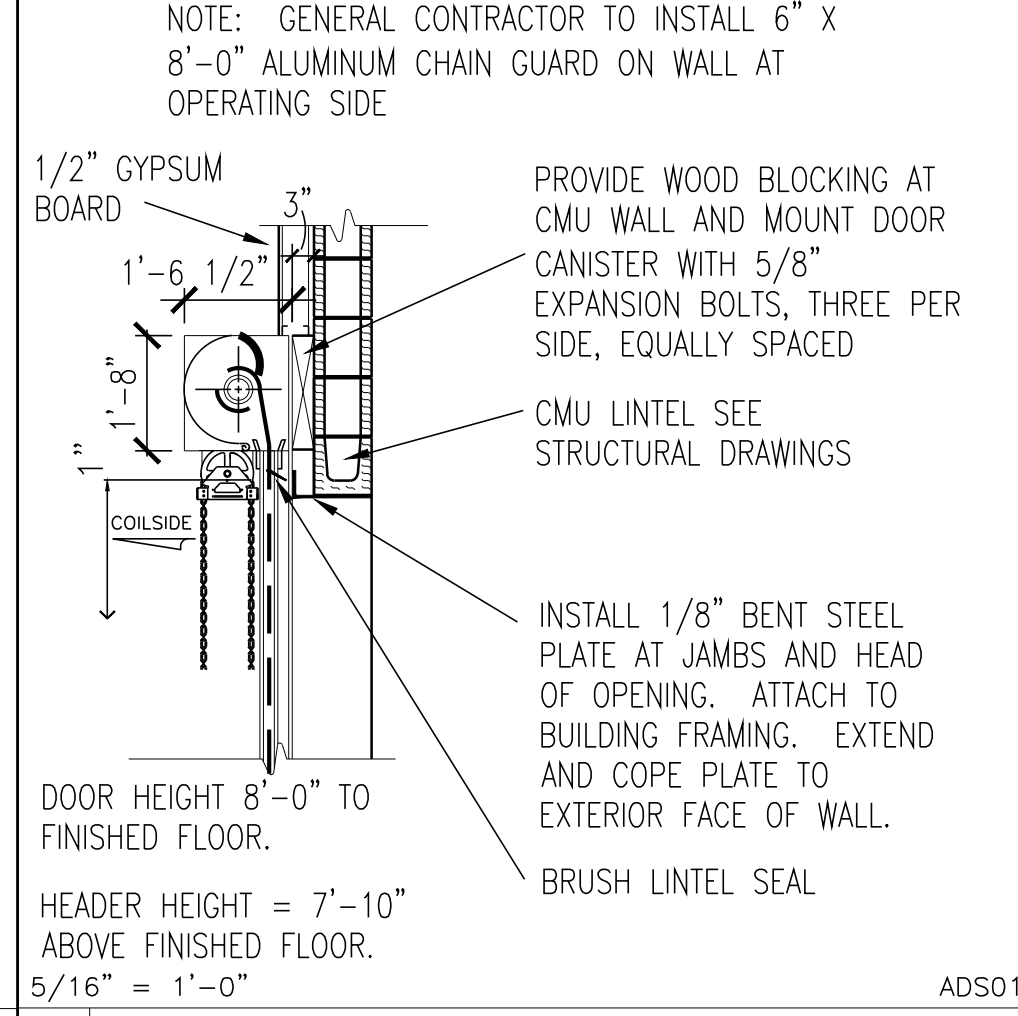

8 OVERHEAD DELIVERY DOOR Ⓐ

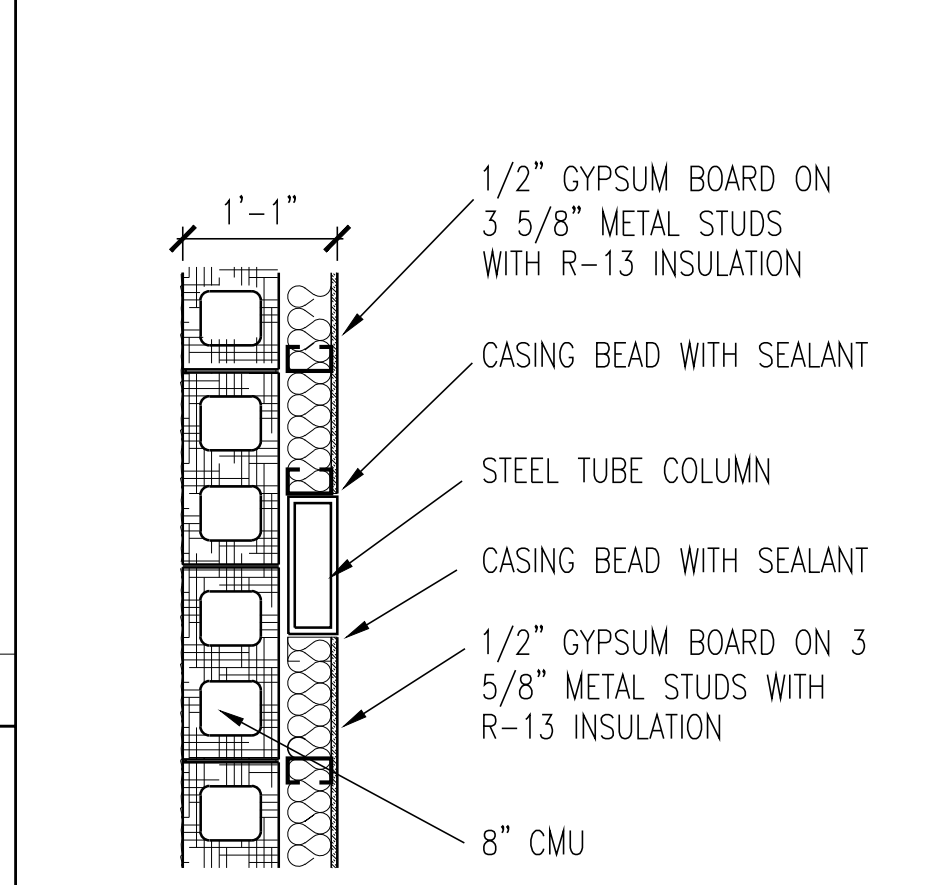

6 REAR GIRDER LINE COLUMN

AutoZone Store No. 11032
35162 ATLANTIC AVE.

MILLVILLE DE 19967

FLOOR PLAN / DOOR SCHEDULE / WALL DETAILS

ARCHITECTURAL GROUP INTERNATIONAL
15 West Seventh Street, Covington, KY 42011
P: 859.461.5400 F: 859.461.5590
www.agi-usa.com
design@agi-usa.com

REVISIONS

1	2	3
4	5	6

11/05/25

65W2-R

A-1